


ROLLFAHRWERK Zulassung nach EN 1808

Bestell-Nr.	Tragfähigkeit	Für Flanschbreite	Kleinsten Kurvenradius	Abmessungen												Gewicht ca.
	[t]	[mm]	[m]	A	B	C	D	E	F	G	H	J	L	M	S	[kg]
09024600	0,25	45-152	0,65	175	220	142	22	22	7	11	50	25	12	74	24	3,50
09024601	0,50	50-220	0,90	225	324	181	27	25	16	11	62	30	16	88	30	8,50
09024602	0,50	220-320	0,90	225	324	181	27	25	16	11	62	30	16	88	30	9,20
09024605	1,00	58-220	1,00	252	334	197	30	30	17	15	62	35	17	103	30	11,10
09024607	1,00	220-320	1,00	252	334	197	30	30	17	15	62	35	17	103	30	12,00
09024610	2,00	66-220	1,20	300	342	243	38	40	21	18	80	47	21	127	30	17,60
09024612	2,00	220-320	1,20	300	342	243	38	40	21	18	80	47	21	127	30	18,80
09024615	3,00	74-220	1,30	360	358	307	45	48	21	15	97	58	21	177	45	31,80
09024617	3,00	220-320	1,30	360	358	307	45	48	21	15	97	58	21	177	45	33,40
09024620	5,00	90-220	1,40	400	372	325	52	58	21	20	110	67	21	192	50	48,50
09024622	5,00	220-320	1,40	400	372	325	52	58	21	20	110	67	21	192	50	50,60

Im Lieferumfang: Handkurbel und Innensechskantschlüssel

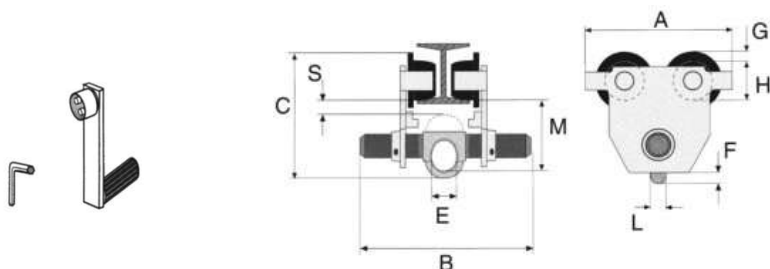

NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com