


Haspelfahrwerk Zulassung nach EN 1808

Handkette für 3 m Aufhängehöhe

Bestell-Nr.	Tragfähigkeit	Für Flanschbreite	Kleinsten Kurvenradius	Abmessungen										Gewicht ca.
				A	B	C	E	F	H	J	L	M	S	
	[t]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
09024650	1,0	58-220	1,0	252	334	202	30	17	62	35	17	103	30	19,0
09024652	1,0	220-320	1,0	252	334	202	30	17	60	35	17	103	30	19,8
09024655	2,0	66-220	1,2	300	342	242	40	18	80	47	21	127	30	22,5
09024657	2,0	220-320	1,2	300	342	242	40	18	80	47	21	127	30	23,6
09024660	3,0	74-220	1,3	360	358	310	48	18	97	58	21	177	45	37,5
09024662	3,0	220-320	1,3	360	358	310	48	18	97	58	21	177	45	38,6
09024665	5,0	90-220	1,4	400	372	345	58	23	110	70	21	192	45	55,0
09024665	5,0	220-320	1,4	400	372	345	58	23	110	70	21	192	45	57,0
09024670	10,0	142-320	2,5	470	583	500	80	30	150	114	30	280	45	115,0
09024680	20,0	153-320	5,0	955	654	500	110	35	150	114	35	270	45	254,0

09024699 Handkette 5 x 24 mm

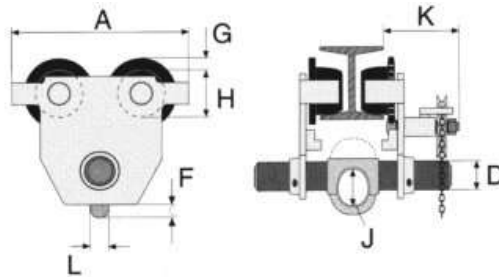

Im Lieferumfang: Handkurbel und Innensechskantschlüssel.

NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com