


Hochfeste Schäkel mit Schraubbolzen

Geschweifte Form, verzinkt

Bestell-Nr.	Trag-fähigkeit	Nenn-größe	Abmessungen							Gewicht ca.
			d1	d2	d3	d4	b1	b2	h2	
	[t]	NG	[mm]	[mm]	[mm]	Zoll *	[mm]	[mm]	[mm]	[kg]
29020000	0,33	3/16	6	6	14	5/32	10	15	23	0,04
29020001	0,50	1/4	7	8	17	1/4	12	19	28	0,05
29020002	0,75	5/16	8	10	21	3/8	13	21	31	0,08
29020003	1,00	3/8	10	11	25	7/16	16	26	36	0,13
29020004	1,50	7/16	11	13	27	1/2	18	29	42	0,19
29020005	2,00	1/2	13	16	30	5/8	21	33	48	0,31
29020006	3,25	5/8	16	19	40	3/4	27	43	60	0,55
29020007	4,75	3/4	19	22	48	7/8	32	51	71	0,96
29020008	6,50	7/8	22	25	54	1	36	58	84	1,40
29020009	8,50	1	25	29	60	1 1/8	43	68	95	2,03
29020010	9,50	1 1/8	29	32	67	1 1/4	46	74	108	2,97
29020011	12,00	1 1/4	32	35	76	1 3/8	52	82	119	4,01
29020012	13,50	1 3/8	35	38	84	1 1/2	57	92	133	5,40
29020013	17,00	1 1/2	38	41	92	1 5/8	60	98	146	7,29
29020014	25,00	1 3/4	44	51	110	2	73	127	178	11,25
29020015	35,00	2	51	57	127	2 1/4	83	146	197	16,20
29020016	55,00	2 1/2	63	70	152	2 3/4	105	184	267	33,30

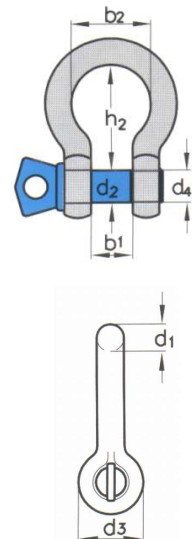

* Gewinde. Andere Größen bis 150 t auf Anfrage.

NEUMANN GMBH	Paul-Ehrlich-Straße 5a	Tel. 06074 8504-0	E-Mail info@neumann-gmbh.com
Hebesysteme Fördertechnik	63128 Dietzenbach	Fax 06074 850412	www.neumann-gmbh.com