


Hochfeste Schäkel mit Bolzen, Mutter und Splint

Geschweißte Form, verzinkt

Bestell-Nr.	Trag-fähigkeit	Nenn-größe	d1	d2	d3	d4	b1	b2	h2	Gewicht ca.
	[t]	NG	[mm]	[mm]	[mm]	Zoll *	[mm]	[mm]	[mm]	
29020076	0,50	1/4	6	8	17	1/4	12	19	28	0,07
29020077	0,75	5/16	8	10	21	5/16	13	21	31	0,11
29020078	1,00	3/8	10	12	26	3/8	16	26	36	0,18
29020079	1,50	7/16	11	14	28	7/16	18	29	42	0,25
29020080	2,00	1/2	13	16	30	5/8	21	33	48	0,37
29020081	3,25	5/8	16	19	40	3/4	27	43	60	0,71
29020082	4,75	3/4	19	22	48	7/8	32	51	71	1,27
29020083	6,50	7/8	22	25	54	1	36	58	84	1,78
29020084	8,50	1	25	29	60	1 1/8	43	68	95	2,52
29020085	9,50	1 1/8	29	32	67	1 1/4	46	74	108	3,53
29020086	12,00	1 1/4	32	35	76	1 3/8	52	82	119	5,04
29020087	13,50	1 3/8	35	38	84	1 1/2	57	92	133	6,84
29020088	17,00	1 1/2	38	41	92	1 5/8	60	98	146	8,78
29020089	25,00	1 3/4	44	51	110	2	73	127	178	14,09
29020090	35,00	2	51	57	127	2 1/4	83	146	197	20,84
29020091	55,00	2 1/2	63	70	152	2 2/3	105	184	267	42,30
29020092	85,00	3	76	82	165	3 1/4	127	200	330	65,25
29020093	120,00	3 1/2	89	95	203	3 3/4	146	230	381	112,50
29020094	150,00	4	102	108	229	4 1/4	165	260	432	161,50
29020095	175,00	4 3/8	111	130	262	5 1/8	184	290	464	236,30

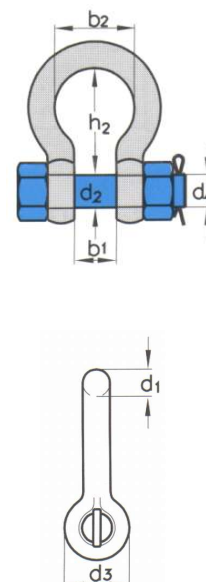

* Gewinde

NEUMANN GMBH

Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a

63128 Dietzenbach

Tel. 06074 8504-0

Fax 06074 850412

E-Mail info@neumann-gmbh.com

www.neumann-gmbh.com