



PLATTENSTÄNDER

Profilrohr-Konstruktion, geschweißt, pulverbeschichtet, standfest durch 4 Gummifüße

Bestell-Nr	Tragfähigkeit	Ladefläche L x B	Außenmaß L x B x H	Ausführung	Gewicht ca.
	[kg]	[mm]	[mm]		[kg]
33006730	500	1600 x 500	1610 x 580 x 870	Holzwerkstoffplatte	54,0
33006731	500	1600 x 500	1610 x 580 x 870	Zinkblechboden	56,0
33006732	500	1600 x 500	1610 x 580 x 870	Holzwerkstoffplatte	56,0
33006733	500	1600 x 500	1610 x 580 x 870	Zinkblechboden	58,0
33006734	1200	1200 x 800	1365 x 800 x 100		45,0
33006735	1200	1600 x 800	1765 x 800 x 100		51,0

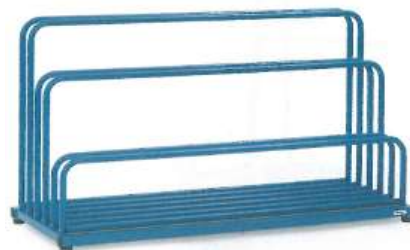

33006730 / 33006731

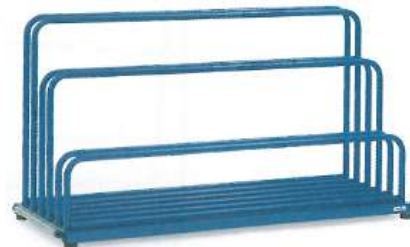

33006732 / 33006733




33006734 / 33006735

Einsteckbügel

	-	Länge	Höhe	-	Gewicht
33006736	-	1200	300	-	5,0
33006737	-	1200	600	-	6,0
33006738	-	1200	900	-	7,5
33006739	-	1600	300	-	6,0
33006740	-	1600	600	-	7,0
33006741	-	1600	900	-	8,5

Plattenfüße

33006742	-	-	-	-	6,0
----------	---	---	---	---	-----



Plattenfüße
33006742

NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com