


Schäkel Form A mit Augbolzen, ähnlich DIN 82101, Ausführung verzinkt

Bestell-Nr.	Tragfähigkeit [t]	Abmessungen							Gewicht ca. [kg]
		d1 [mm]	d2 [mm]	d3 [mm]	d4 Gewinde	d5 [mm]	b1 [mm]	h1 [mm]	
29010001	0,10	6	5	10	M 5	4	7	15,5	0,01
29010002	0,16	7	6	12	M 6	6	8	18,0	0,02
29010003	0,25	8	8	16	M 8	8	11	24,0	0,04
29010004	0,40	9	10	20	M 10	10	14	30,0	0,08
29010005	0,63	10	12	24	M 12	12	17	36,0	0,17
29010006	1,00	13	16	32	M 16	15	21	49,0	0,36
29010007	1,60	17	20	40	M 20	19	27	61,0	0,75
29010008	2,00	19	22	44	M 22	21	30	67,0	1,00
29010009	2,50	21	24	48	M 24	23	33	73,0	1,32
29010010	3,15	24	27	54	M 27	26	38	83,5	1,85
29010011	4,00	27	30	60	M 30	29	42	91,0	2,50
29010012	5,00	30	36	72	M 36	33	47	111,0	4,00
29010013	6,30	34	39	78	M 39	37	53	119,5	5,40
29010014	8,00	38	45	90	M 45	41	60	139,5	7,90
29010015	10,00	42	48	96	M 48	45	66	147,0	10,00
29010016	12,50	47	52	104	M 52	50	73	158,0	13,50
29010017	16,00	52	60	120	M 60	55	81	185,0	19,20
29010018	20,00	58	68	136	M 68	61	90	211,0	28,00
29010019	25,00	63	72	144	M 72	67	100	221,0	34,00

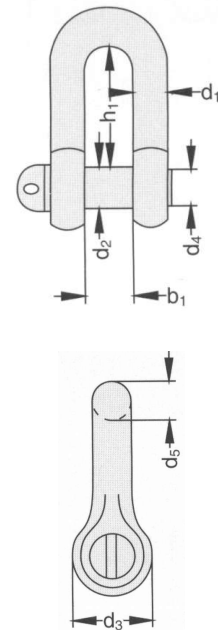

Ausführung roh auf Anfrage.

NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com